

Description


Single and multipole magnetic circuit breakers with trip-free mechanism and toggle actuation. A choice of fast magnetic only or hydraulically delayed switching characteristics (S-type MO or HM CBE to EN 60934) ensures suitability for a wide range of applications. Industry standard dimensions and panel mounting. Options include auxiliary changeover contacts, or relay trip function. Low temperature sensitivity at rated load. Approved to CBE standard EN 60934 (IEC 60934).

Typical applications

Control equipment, communications systems, transportation, power supplies.

Standard current ratings and typical internal resistance values

Current rating (A)	Curves and internal resistance per pole (Ω)				
	F1	F2	K1, M1, T1,	K2, M2, T2	
0.02	1493	953	2669	2457	
0.05	276	152	452	376	
0.1	58	37	100	94	
0.25	8.2	6.0	15.5	14.7	
0.5	2.3	1.47	3.9	3.2	
0.75	0.98	0.63	1.65	1.56	
1	0.58	0.35	0.95	0.90	
2	0.145	0.096	0.26	0.20	
2.5	0.096	0.061	0.15	0.15	
3	0.065	0.048	0.10	0.10	
5	0.025	< 0.02	0.042	0.040	
6	< 0.02	< 0.02	0.029	0.028	
8	< 0.02	< 0.02	< 0.02	< 0.02	
10	< 0.02	< 0.02	< 0.02	< 0.02	
12	< 0.02	< 0.02	< 0.02	< 0.02	
15	< 0.02	< 0.02	< 0.02	< 0.02	
16	< 0.02	< 0.02	< 0.02	< 0.02	
20	< 0.02	< 0.02	< 0.02	< 0.02	
25	< 0.02	< 0.02	< 0.02	< 0.02	
30	< 0.02	< 0.02	< 0.02	< 0.02	
40	≤ 0.01	-	≤ 0.01	-	
50	≤ 0.01	-	≤ 0.01	-	

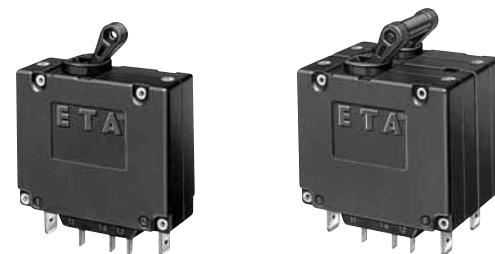

8340-F...

1-pole

2-pole

Technical data

For further details please see chapter: Technical Information						
Voltage rating		3 AC 415 V; AC 240 V, 50/60 Hz; DC 80 V (higher DC ratings to special order)				
Current ratings		0.02...50 A 1-pole (40 + 50 A DC only) 0.02...30 A multipole				
Auxiliary circuit		6 A, AC 240 V 3 A, DC 28 V 1 A, DC 65 V 0.5 A, DC 80 V				
Typical life		3 AC 415 V, AC 240 V: 0.02...30 A 6,000 operations at $1 \times I_N$, inductive DC 80 V: 0.02...25 A 10,000 operations at $1 \times I_N$, resistive 0.02...30 A 6,000 operations at $1 \times I_N$, inductive 40 + 50 A 10,000 operations at $1 \times I_N$, resistive 6,000 operations at $1 \times I_N$, resistive				
Ambient temperature		-40...+85 °C (-40...+185 °F)				
Insulation co-ordination (IEC 60664 and 60664A)		rated impulse withstand voltage pollution degree 2.5 kV 2 reinforced insulation in operating area				
Dielectric strength (IEC 60664 and 60664A)		test voltage AC 3,000 V AC 1,500 V AC 3,000 V AC 1,500 V (version -X)				
Insulation resistance		> 100 MΩ (DC 500 V)				
Interrupting capacity I_{cn}		1,200 A at AC – 2,000 A at DC				
Interrupting capacity (UL 1077)		I_N 0.02...20 A 25...30 A AC: 1-pole AC 250 V/3,500A AC 250 V/3,500A 2-pole AC 250 V/3,500A AC 250 V/5,000A 3-pole 3AC 250V/3,500A 3AC250V/5,000A DC: 1-pole 0.02...50 A DC 80 V/3,500 A 2-pole 0.02...30 A DC 80 V/3500 A				
Interrupting capacity (UL 489A)		2,000 A				
Degree of protection (IEC 60529/DIN 40050)		operating area IP40 terminal area IP00				
Vibration		with toggle down: 10 g (57-2000Hz) ± 0.76 mm (10-57 Hz) at 0.9 × I_N directions 1, 2, 3, 4, 5: 10 g (57-2000 Hz) at $1 \times I_N$. with curves F1, F2 in all planes: 10 g (57-2000 Hz) ± 0.76 mm (10-57 Hz) at 0.8 × I_N , to IEC 60068-2-6, test Fc 10 frequency cycles/axis				
Shock		100 g (11 ms) at $1 \times I_N$, directions 1,2,3,4,5 100 g (11 ms) at 0.8 × I_N , direction 6. 100 g (11 ms) at 0.8 × I_N to IEC 60068-2-27, test Ea				

Corrosion	96 hours at 5 % salt mist to IEC 60068-2-11, test Ka
Humidity	240 hours at 95 % RH to IEC 60068-2-78, test Cab
Mass	approx. 65 g per pole

Ordering information

Type No.

8340 magnetic circuit breaker with toggle actuator

Mounting

F flange mounting

Configuration

1 with mounting nuts 6-32 UNC

4 with mounting nuts M3

9 snap-in frame

Number of poles

0 single pole, switch only

1 single pole protected

2 two pole protected

3 three pole protected

4 four pole protected

5 two pole, protected on one pole only

6 four pole, protected on poles 1, 2 and 3 only

7 two pole, switch only

} magnetic,
hydraulic-magnetic

Panel hardware

0 without panel hardware

Terminal design (main contact)

K3 screw terminals with metric thread, M4
(recommended for $I_N \geq 20$ A)

K4 screw terminals with metric thread, M5 ($I_N = 40$ A)

P1 blade terminals

X1 blade terminals with separate switching
and relay circuit

Characteristic curves
Characteristic curve F, instantaneous trip:

F1 DC trip at $1.01\text{--}1.5 \times I_N$

F2 AC 60/50Hz trip at $1.01\text{--}1.5 \times I_N$

Characteristic curve K, short delay:

K1 DC trip time at $2 \times I_N$: 0.16-1.2 s

K2 AC 60/50Hz trip time at $2 \times I_N$: 0.13-1.6 s

Characteristic curve M, medium delay:

M1 DC trip time at $2 \times I_N$: 0.6-7.5 s

M2 AC 60/50Hz trip time at $2 \times I_N$: 2.2-20 s

Without characteristic curve:

Q0 switch only

Characteristic curve T, long delay:

T1 DC trip time at $2 \times I_N$: 10-70 s

T2 AC 60/50Hz trip time at $2 \times I_N$: 15-150 s

Relay trip X:

X1 voltage trip at DC, instantaneous trip

X2 voltage trip at AC, instantaneous trip

Other curves to special order (e.g. pulse delayed,
high inrush currents, capacitive loads)

Actuator colour / design

A black, long toggle

B white, long toggle

C blue, long toggle

K black, short toggle

L white, short toggle

M blue, short toggle

Z black, without toggle, with slot

other colours to special order
Marking on actuator

0 without marking

L I-O; ON-OFF

N I-O; ON-OFF (I_N on housing top)

Auxiliary contacts

H0 without auxiliary contacts

H1 with auxiliary contacts, gold-flushed

H2 auxiliary contacts, gold-flushed
on one pole only (multipole)

H3 auxiliary contacts, gold-flushed
on poles 1 and 3 (3 and 4-pole)

Auxiliary contact function

4 1 change over contact

Auxiliary contact terminal design

2 blade terminal 2.8-0.5 mm

Current ratings

0.02...50 A

8340 - F 1 1 0 - P1 M1 - A L H1 4 2 - 30 A

Voltage rating

only curves X1, X2

DC 5, 8, 12, 24 V

AC 110, 220, 240 V

Options

H higher flammability
rating

Approvals
upon request

Approval (optional)

U UL 489 A





U ordering example

8340 - F 1 1 0 - P1 M1 - A L H1 4 2 - 30 A - ... - ... - U

Approvals

Authority	Voltage ratings	Current ratings
VDE (EN 60934)	3 AC 415 V; AC 240 V; DC 80 V DC 80 V	0.02...30 A 1 to 6-pole 0.02...50 A 1-pole
UL 1077, CSA	DC 80 V 3 AC 250 V; AC 250 V	0.02...50 A 1 to 6-pole 0.02...30 A 1 to 6-pole
UL 489 A	DC 80 V	0.05...30 A 1, 2-pole
QPL (Sweden)	AC 240 V; DC 50 V	1...30 A
CCC	3 AC 415 V; AC 240 V DC 80 V	0.02...30 A 0.02...50 A 1, 2-pole

Internal connection diagrams

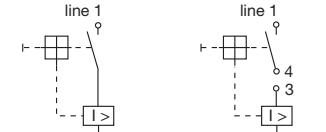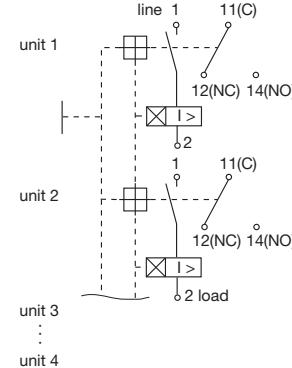
1-pole protected magnetically

with separate switching and relay circuit

1-pole protected hydraulic-magnetic

multipole


8340 - F 1 1 0 - P1 M1 - A L H1 4 2 - 30 A

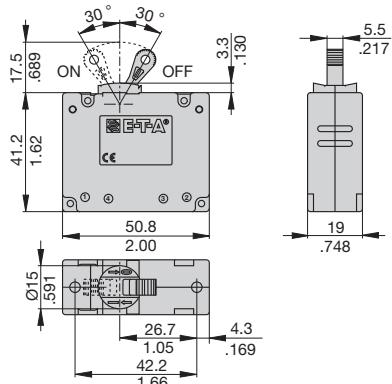
Dimensions

Flange mounting Configuration: F1/F4


Actuator: long toggle



Actuator: short toggle

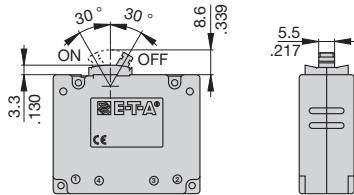


Actuator: without toggle, with slot

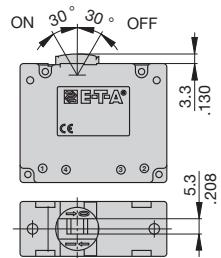


Applicable for nominal dimensions without direct tolerance indication:
DIN ISO 286 ± IT13

number of poles: 1-4

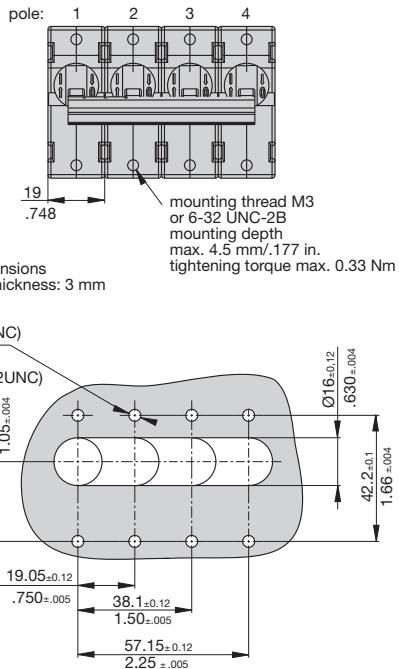


Configuration: F9


Actuator: long toggle

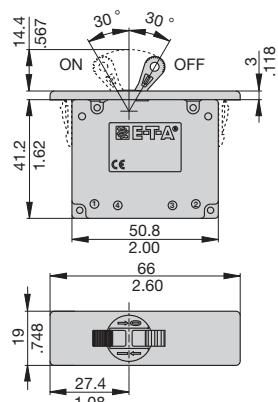


Actuator: short toggle




Actuator: without toggle, with slot



number of poles: 1-4

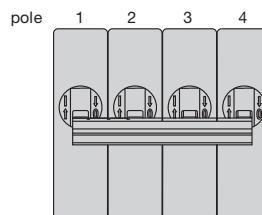

Cut-out dimensions
max. panel thickness: 2 ± 0,5 mm

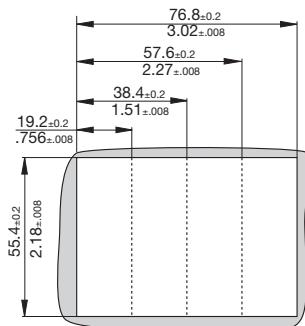


Applicable for nominal dimensions without direct tolerance indication:
DIN ISO 286 ± IT13


This is a metric design and millimeter dimensions take precedence ($\frac{\text{mm}}{\text{inch}}$)

Terminal design / Dimensions


K 3/4 screw terminals
tightening torque max. 1.2 Nm

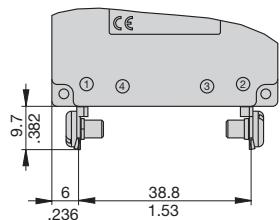

K3 screw terminals M4
K4 screw terminals M5

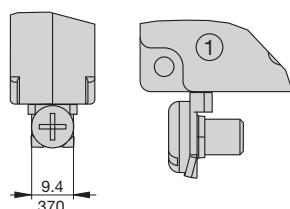


P1 blade terminals

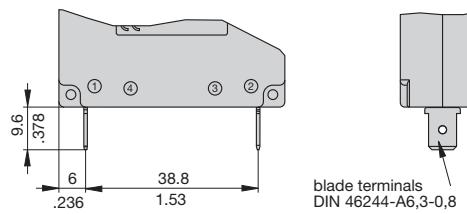


blade terminals
DIN 46244-A6,3-0,8

X1 blade terminals
with separate switching and relay circuit

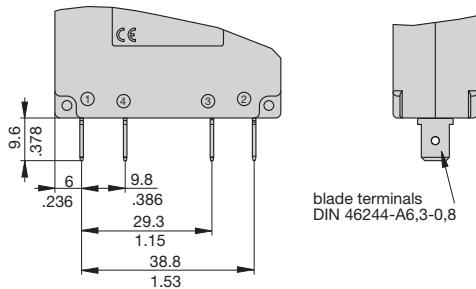

blade terminals
DIN 46244-A6,3-0,8

Auxiliary contacts
version H (standard, asymmetrical gold-flushed terminals,
silver contacts)

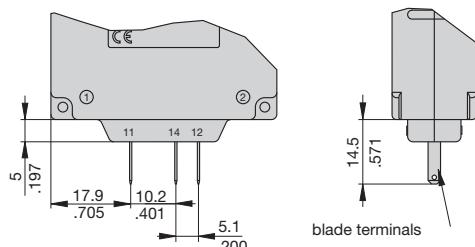


blade terminals


Actuator configuration

Actuator design
number of poles: 1 - 4
Configuration: F1 / F4

Actuator long

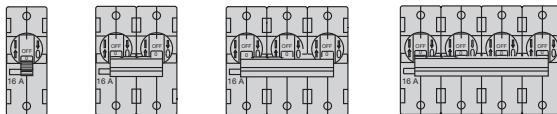


Actuator short




number of poles: 1 - 4
Configuration: F9

Actuator long

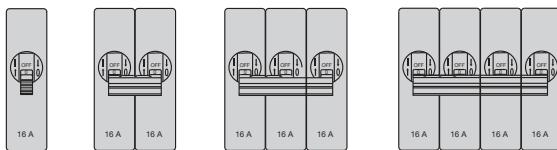


number of poles: 1
Configuration: F1 / F4 / F9

Actuator: Z (black, without toggle, with slot)




Installation drawing

Terminal design K







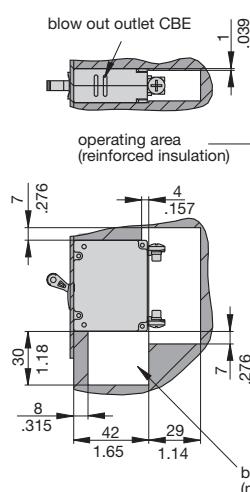


Terminal design P

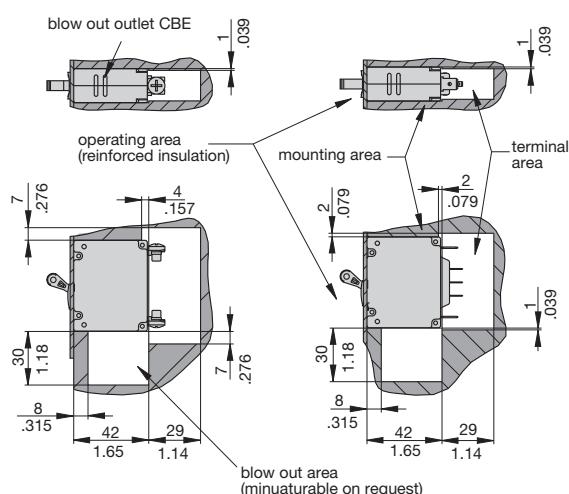

Trip time values indicated for front mounting on a vertical even surface

Typical time/current characteristics at 23 °C / +73.4 °F

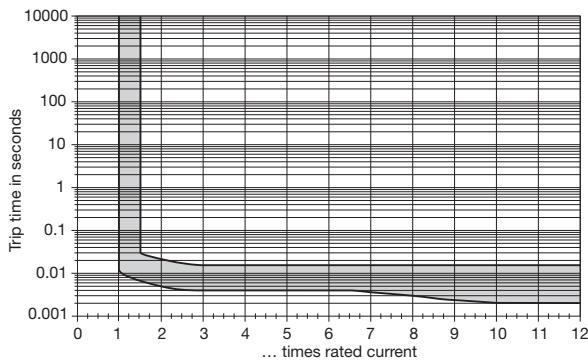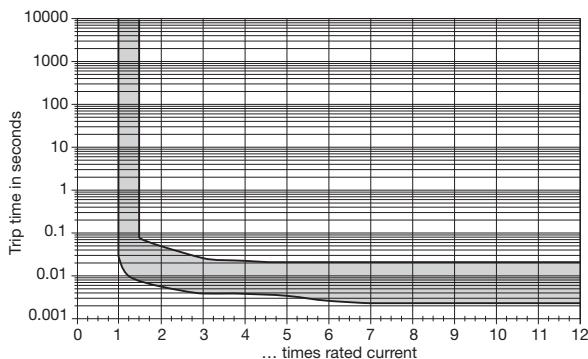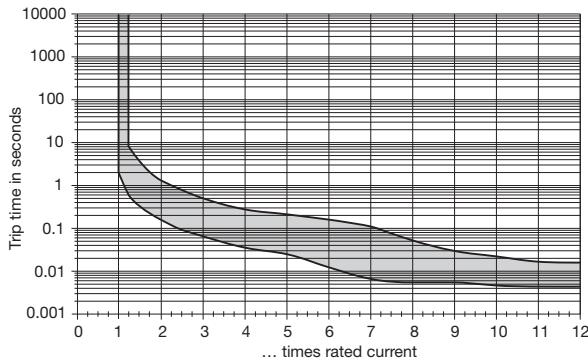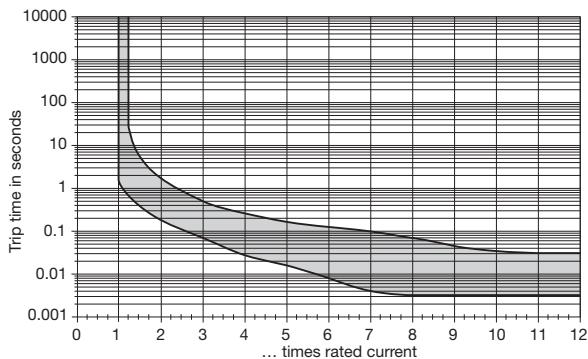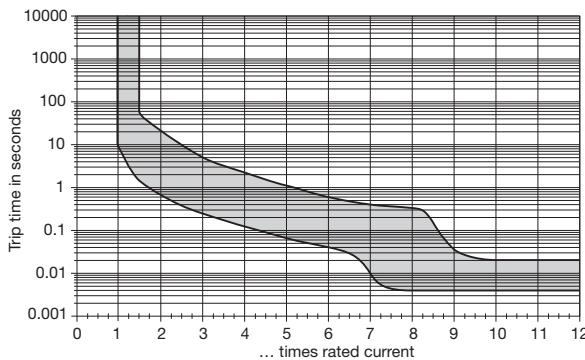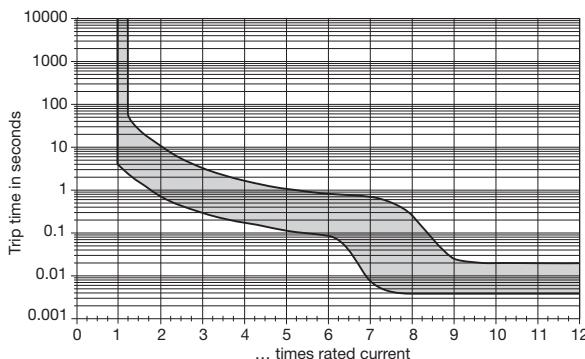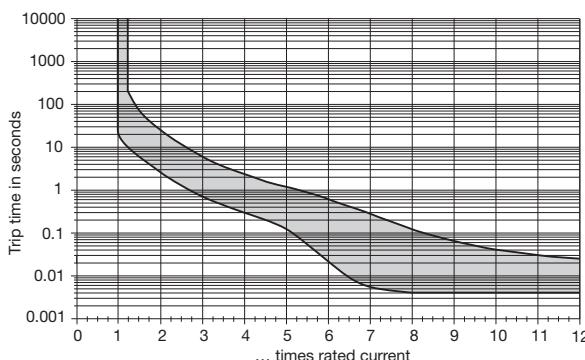
Curve F1 (instantaneous) for DC

Curve F2 (instantaneous) for AC 50/60 Hz

Curve K1 (short delay) for DC

Curve K2 (short delay) for AC 50/60 Hz

Curve M0 (medium delay) for AC/DC

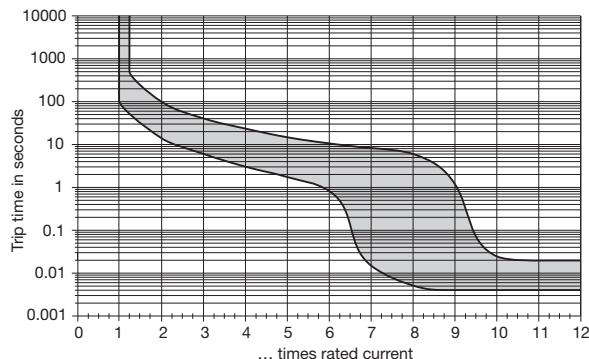Curve M1 (medium delay) for DC

Curve M2 (medium delay) for AC 50/60 Hz


N.B. All curves will only be maintained if the escutcheon is mounted on a vertical surface.


Other characteristic curves to special order (e. g. with impulse delay for inrush peaks).

Typical time/current characteristics at 23 °C / +73.4 °F

Curve T1 (long delay) for DC




Curve T2 (long delay) for AC 50/60 Hz

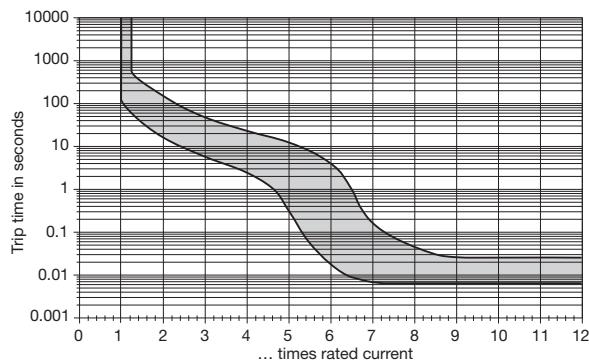

N.B. All curves will only be maintained if the escutcheon is mounted on a vertical surface.


Other characteristic curves to special order (e. g. with impulse delay for inrush peaks).

Shock directions / Mounting attitudes

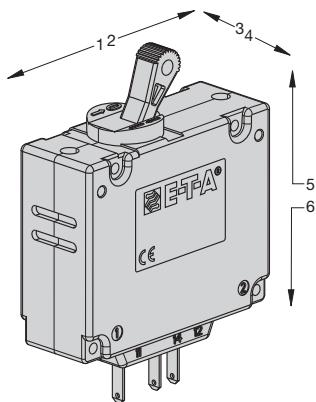


Accessories

Splash cover with mounting plate and screws

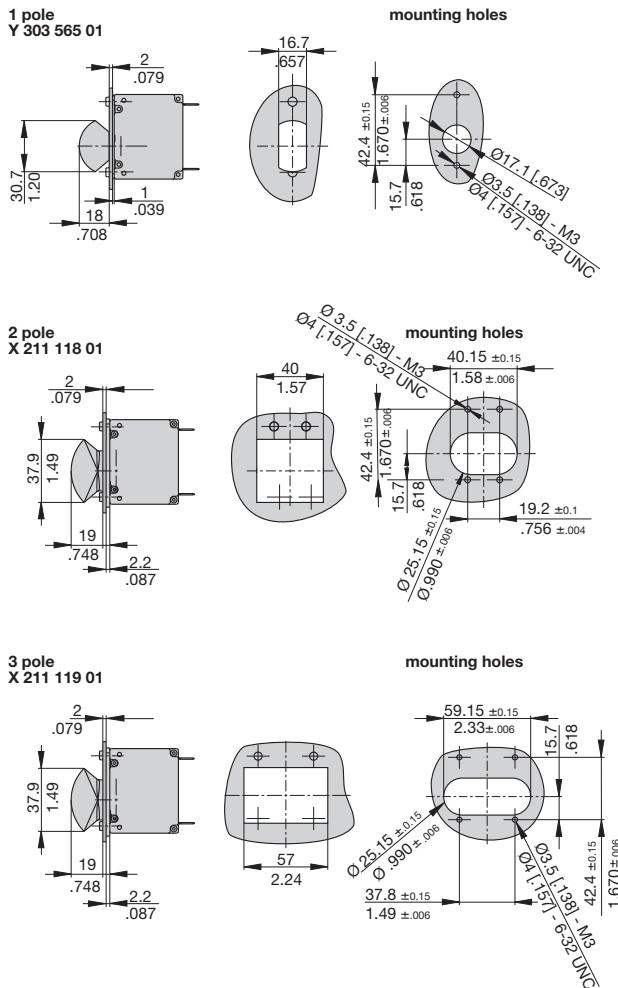

Toggle guard
Y 307 250 01

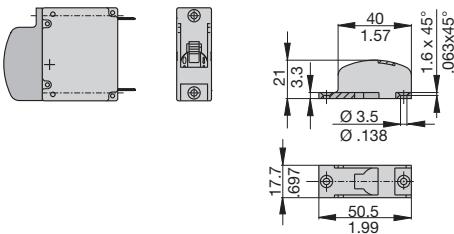

This is a metric design and millimeter dimensions take precedence ($\frac{\text{mm}}{\text{inch}}$)

All dimensions without tolerances are for reference only. In the interest of improved design, performance and cost effectiveness the right to make changes in these specifications without notice is reserved. Product markings may not be exactly as the ordering codes. Errors and omissions excepted.