

Description

Miniaturised single pole thermal circuit breaker with push-to-reset tease-free, trip-free, snap action mechanism (R-type TO CBE to EN 60934). Available in versions for panel mounting, snap-in or threadneck, or as an integral type. For lower current ratings see types 104, 105, 106. Approved to CBE standard EN 60934 (IEC 60934).

Typical applications

Motors, transformers, solenoids, hand-held machines and appliances.

Ordering information

Type No.

1140 single pole thermal circuit breaker

Mounting

E2 integral mounting

F1 snap-in panel mounting

G1 threadneck panel mounting 3/8-27UNS with hex nut and knurled nut*

G4 threadneck panel mounting 3/8-27UNS with knurled nut*

Number of poles

1 1-pole protected

Actuator style

1 black push button (standard)

Terminal design

P1 blade terminals A6.3-0.8 (QC .250)

Characteristic curve

M1 medium delaye

Current ratings

3.5...16 A

1140 - F1 1 1 - P1 M1 - 10 A = ordering example

*mounting hardware bulk shipped

Standard current ratings and typical internal resistance values

Current rating (A)	Internal resistance (Ω)	Current rating (A)	Internal resistance (Ω)
3.5	0.06	10	< 0.02
4	0.04	12	< 0.02
5	0.03	13	< 0.02
6	0.02	15	< 0.02
7	< 0.02	16	< 0.02
8	< 0.02		

Approvals

Authority	Voltage ratings	Current ratings
VDE	AC 240 V; DC 48 V	3.5...16 A
CSA, UL	AC 250 V; DC 50 V	3.5...16 A
Kema (EN 60934)	AC 240 V; DC 48 V	3.5...16 A

All dimensions without tolerances are for reference only. In the interest of improved design, performance and cost effectiveness the right to make changes in these specifications without notice is reserved. Product markings may not be exactly as the ordering codes. Errors and omissions excepted.



1140-E...

1140-F...

1140-G.1.

Technical data

For further details please see chapter: Technical Information

Voltage rating AC 240 V; DC 48 V
(UL: AC 250 V; DC 50 V)

Current ratings 3.5...16 A

Typical life AC + DC 3.5...8 A 200 operations at $2 \times I_N$, inductive
9...16 A 1,000 operations at $2 \times I_N$, resistive
100 operations at $2 \times I_N$, inductive

Ambient temperature -20...+60 °C (-4...+140 °F) T 60

Insulation co-ordination (IEC 60664 and 60664 A) rated impulse withstand voltage 2.5 kV pollution degree 2 reinforced insulation in operating area

Dielectric strength (IEC 60664 and 60664 A) operating area test voltage AC 3,000 V

Insulation resistance > 100 MΩ (DC 500 V)

Interrupting capacity I_{cn} 3.5...8 A 8 × I_N
10...16 A 120 A

Interrupting capacity (UL 10777) I_N U_N
3.5...16 A DC 50 V 2,000 A
3.5...16 A AC 250 V 2,000 A

Degree of protection (IEC 60529/DIN 40 050) operating area IP40
terminal area IP00

Vibration 10 g (57-500 Hz) ± 0.76 mm (10-57 Hz),
to IEC 60068-2-6, test Fc,
10 frequency cycles/axis


Shock 25 g (11 ms)
to IEC 60068-2-27, test Ea

Corrosion 96 hours at 5 % salt mist,
to IEC 60068-2-11, test Ka

Humidity 240 hours at 95 % RH
to IEC 60068-2-78, test Cab


Mass approx. 10 g

Dimensions

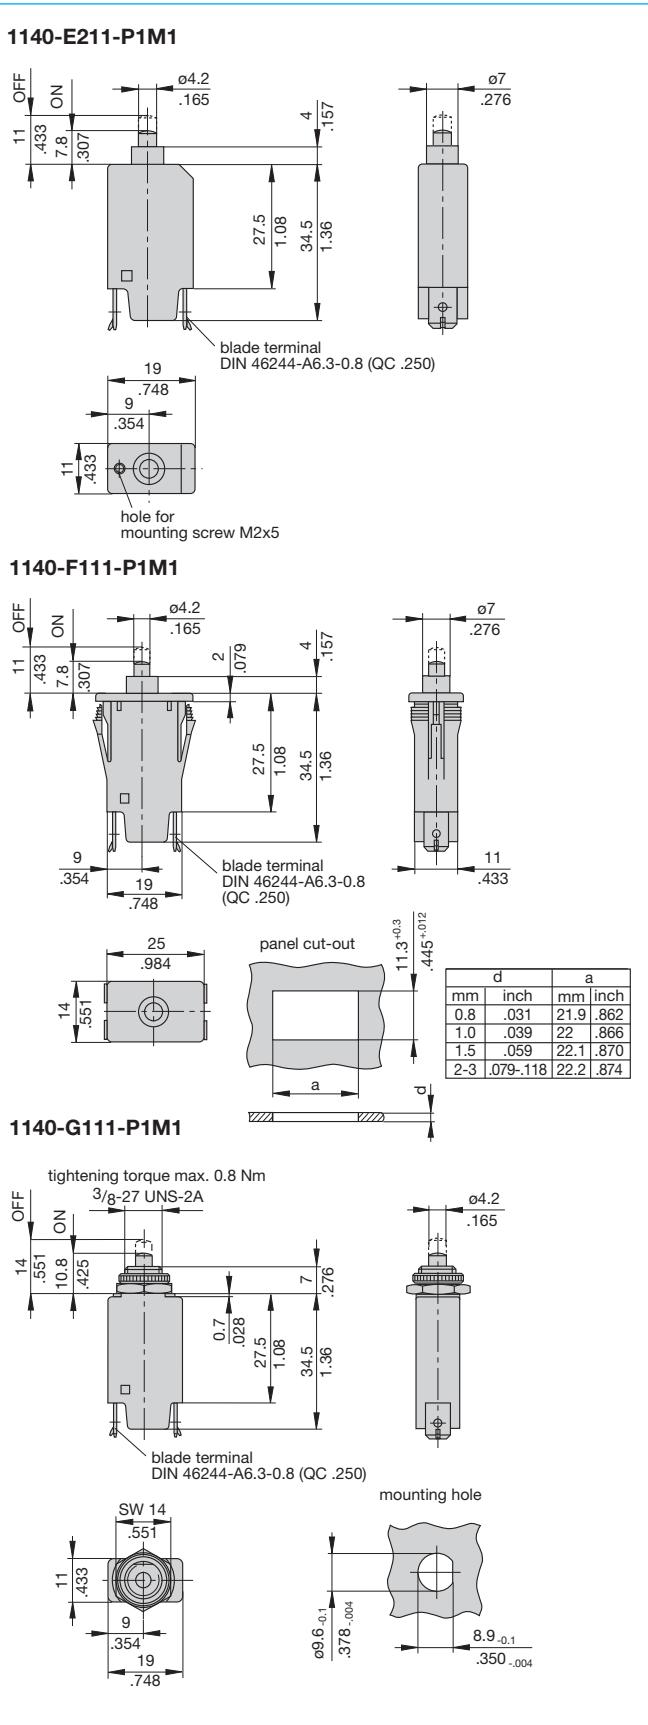


This is a metric design and millimeter dimensions take precedence ($\frac{\text{mm}}{\text{inch}}$)


Internal connection diagram

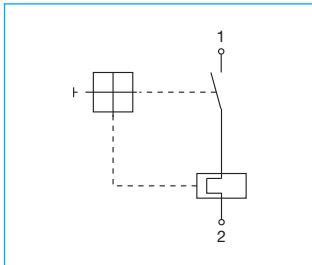

Accessory

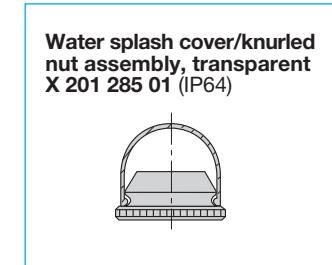

Typical time/current characteristics at +23 °C/+73.4 °F

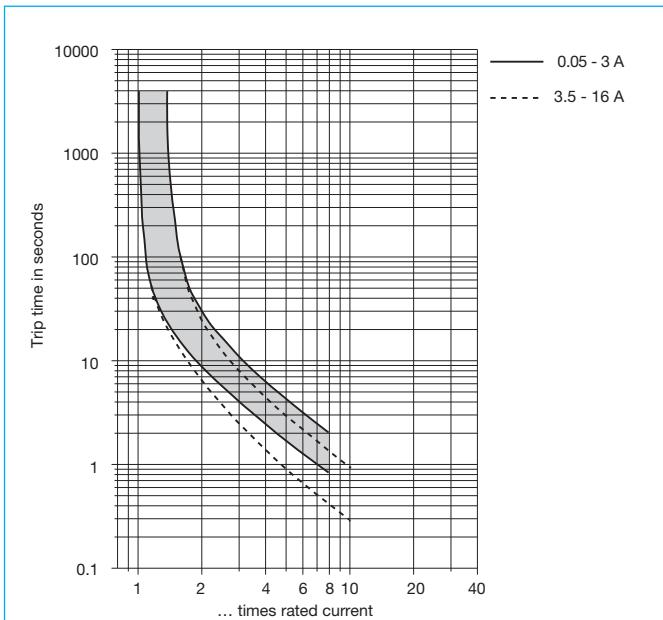

The time/current characteristic curve depends on the ambient temperature prevailing. In order to eliminate nuisance tripping, please multiply the circuit breaker current ratings by the derating factor shown below. See also section 9 – Technical information.

Ambient temperature	°F °C	-4 -20	+14 -10	+32 0	+73.4 +23	+104 +40	+122 +50	+140 +60
Derating factor		0.76	0.84	0.92	1	1.08	1.16	1.24

Installation drawings

