

## Description

Single pole thermal-magnetic circuit breaker with tease-free, trip-free, snap action mechanism and two button operation (M-type TM CBE to EN 60934). Featuring a narrow profile housing, recessed terminals, standard EN rail mounting, and precision CBE performance. Approved to CBE standard EN 60934 (IEC 60934).

## Typical applications

Process control systems, instrumentation, rail vehicles.

## Ordering information

| Type No.               |                                   |
|------------------------|-----------------------------------|
| 201                    | single pole, rail mounted version |
| 201-WA                 | low-resistance version            |
|                        | <b>Option</b>                     |
| 2705                   | fitted with adapter X 200 409 01  |
|                        | <b>Current ratings</b>            |
|                        | 0.05...16 A (type 201)            |
|                        | 0.05...10 A (type 201-WA)         |
| 201 - .. - .... - 10 A | ordering example                  |


The exact part number required can be built up from the table of choices shown above. Ordering references for optional features should be omitted if not required.

## Standard current ratings and typical internal resistance values

| Current rating (A) | Internal resistance ( $\Omega$ ) |        | Current rating (A) | Internal resistance ( $\Omega$ ) |        |
|--------------------|----------------------------------|--------|--------------------|----------------------------------|--------|
|                    | 201                              | 201-WA |                    | 201                              | 201-WA |
| 0.05               | 447                              | 211    | 3                  | 0.19                             | 0.054  |
| 0.1                | 131                              | 48     | 4                  | 0.090                            | 0.035  |
| 0.2                | 40                               | 12.4   | 5                  | 0.061                            | 0.025  |
| 0.3                | 19.3                             | 5.7    | 6                  | 0.041                            | < 0.02 |
| 0.4                | 10.4                             | 3.1    | 7                  | 0.034                            | < 0.02 |
| 0.5                | 7.1                              | 2.0    | 8                  | < 0.02                           | < 0.02 |
| 0.6                | 4.3                              | 1.32   | 10                 | < 0.02                           | < 0.02 |
| 0.8                | 2.5                              | 0.76   | 12                 | < 0.02                           | < 0.02 |
| 1                  | 1.67                             | 0.49   | 14                 | < 0.02                           | < 0.02 |
| 1.5                | 0.61                             | 0.21   | 15                 | < 0.02                           | < 0.02 |
| 2                  | 0.38                             | 0.101  | 16                 | < 0.02                           | < 0.02 |
| 2.5                | 0.24                             | 0.078  |                    |                                  |        |

## Approvals

| Authority       | Voltage ratings   | Current ratings |
|-----------------|-------------------|-----------------|
| VDE (EN 60 934) | AC 240 V; DC 65 V | 0.05...16 A     |
| CSA, UL         | AC 250 V; DC 80 V | 0.05...16 A     |
| UL              | DC 65 V           | 0.05...25 A     |

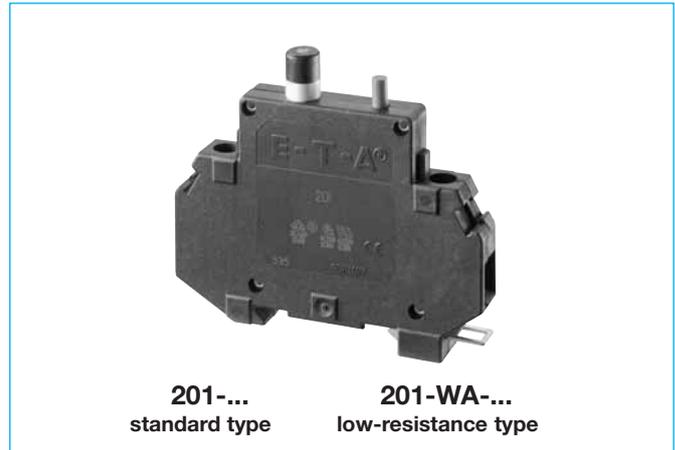


## Technical data


For further details please see chapter: **Technical Information**

|   |  |   |                                 |
|---|--|---|---------------------------------|
| Voltage rating  | AC 240 V (50/60 Hz); DC 65 V<br>(UL: AC 250 V; DC 80 V)  |   |                                 |
| Current rating range  | 201: 0.05...16 A<br>201-WA: 0.05...10 A  |   |                                 |
| Typical life  | 5,000 operations at $1 \times I_N$ , inductive<br>5,000 operations at $2 \times I_N$ , resistive   |   |                                 |
| Ambient temperature   | -30...+60 °C (-22...+140 °F)   |   |                                 |
| Insulation co-ordination<br>(IEC 60664 and 60664 A)             | rated impulse<br>withstand voltage<br>2.5 kV<br>reinforced insulation                              | pollution<br>degree<br>2<br>in operating area     |                                 |
| Dielectric strength<br>(IEC 60664 and 60664A)<br>operating area | test voltage<br>AC 3,000 V   |   |                                 |
| Insulation resistance   | > 100 M $\Omega$ (DC 500 V)  |   |                                 |
| Interrupting capacity $I_{cn}$                                  | 201<br>0.05...0.8 A<br>1...2 A<br>2.5...16 A   | 201-WA<br>0.05...0.2 A<br>0.3...2 A<br>2.5...10 A | self-limiting<br>200 A<br>400 A |
| Interrupting capacity<br>(UL 1077)                              | $I_N$<br>0.05...16 A<br>0.05...16 A  | $U_N$<br>AC 250 V<br>DC 80 V                      | 1,000 A<br>1,000 A              |
| Degree of protection<br>(IEC 60529/DIN 40050)                   | operating area IP40<br>terminal area IP20  |   |                                 |
| Vibration   | 5 g (57-500 Hz), $\pm$ 0.38 mm (10-57 Hz)<br>to IEC 60068-2-6, test Fc<br>10 frequency cycles/axis |   |                                 |
| Shock   | 25 g (11 ms)<br>to IEC 60068-2-27, test Ea   |   |                                 |
| Corrosion   | 96 hours at 5 % salt mist,<br>to IEC 60068-2-11, test Ka   |   |                                 |
| Humidity  | 240 hours at 95 % RH<br>to IEC 60068-2-78, test Cab  |   |                                 |
| Mass  | approx. 60 g   |   |                                 |

## Dimensions

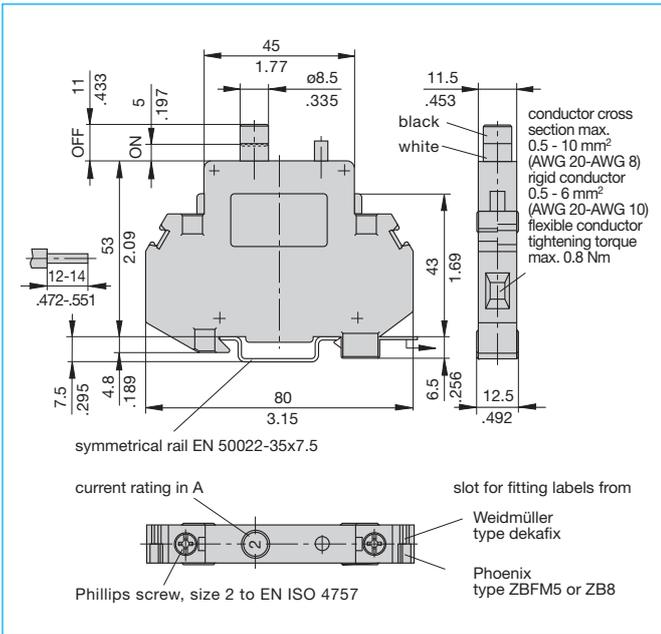


## Installation drawing

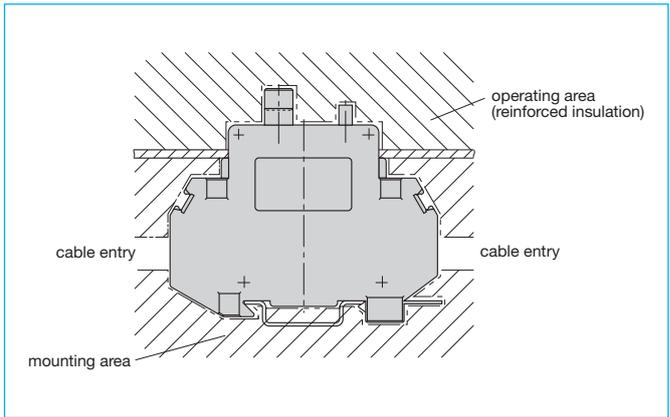

This is a metric design and millimeter dimensions take precedence ( $\frac{\text{mm}}{\text{inch}}$ )


## Internal connection diagram

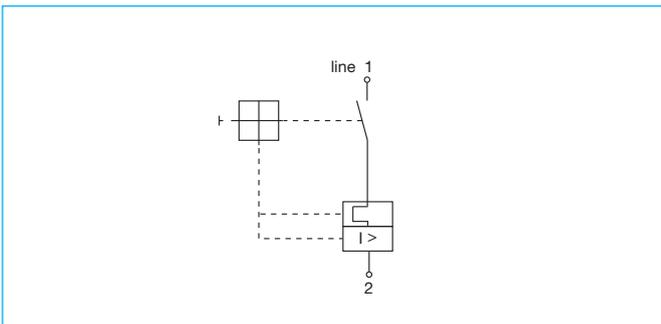

The time/current characteristic curve depends on the ambient temperature prevailing. In order to eliminate nuisance tripping, please multiply the circuit breaker current ratings by the derating factor shown below. See also section 9 – Technical information.

| Ambient temperature °F | -22  | -4   | +14  | +32  | +73.4 | +104 | +122 | +140 |
|------------------------|------|------|------|------|-------|------|------|------|
| °C                     | -30  | -20  | -10  | 0    | +23   | +40  | +50  | +60  |
| Derating factor        | 0.76 | 0.79 | 0.83 | 0.88 | 1     | 1.08 | 1.16 | 1.24 |

## Typical time/current characteristics

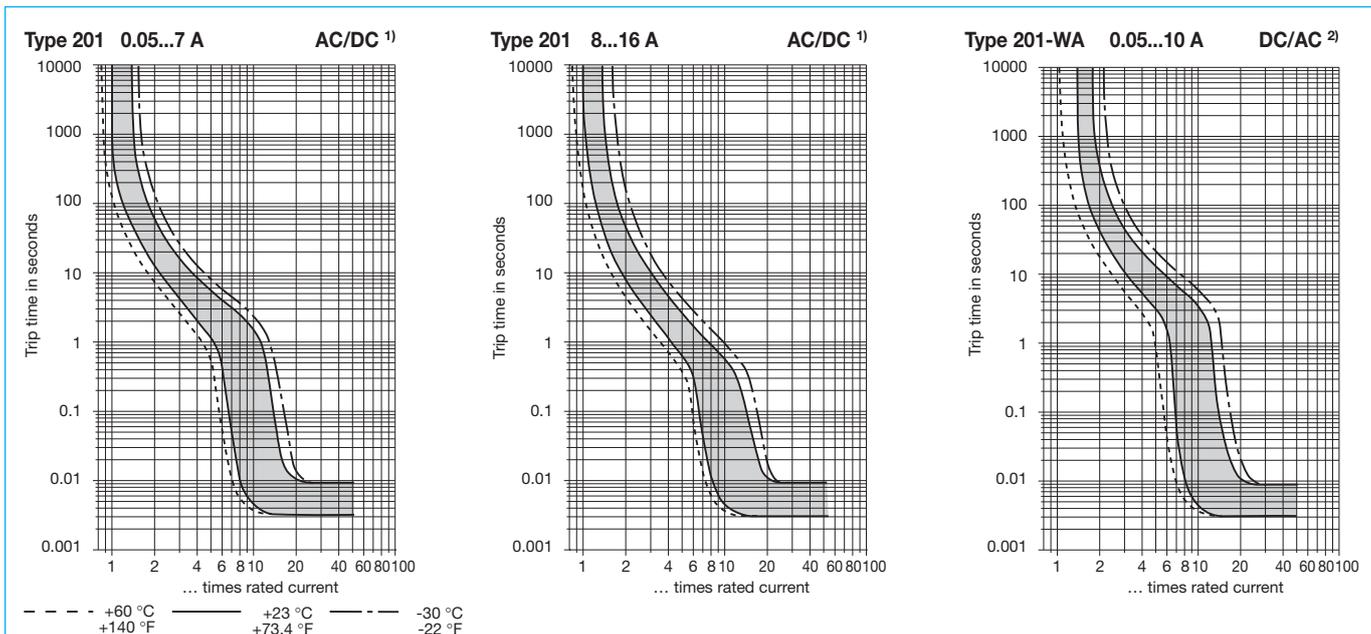


<sup>1)</sup> Magnetic tripping currents are increased by 20% on DC supplies.

<sup>2)</sup> Magnetic tripping currents are decreased by 20% on AC supplies.



## Accessories

### Busbar 1-pole, 90° X 222 540 01

The one metre long busbars can be cut to suitable lengths. Plug-on caps can be fitted on the ends to provide brush contact protection.  
I<sub>max</sub> - busbar 100 A (40°C)

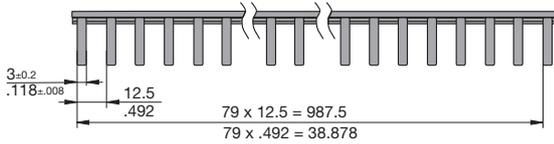


### Plug-on cap, 1-pole Y 307 851 01

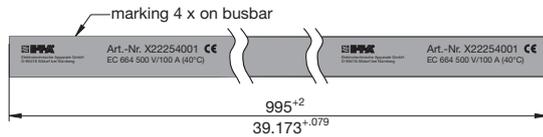


### Supply terminal I<sub>max</sub> 63 A Y 308 551 01

Max. tightening torque of terminal screw 2 Nm  
Max. cable cross section: 25 mm<sup>2</sup> / single strand  
16 mm<sup>2</sup> / multistrand with wire end ferrule

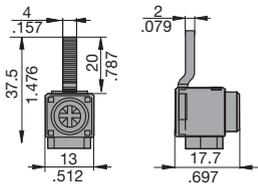


### Adapter for EN rail 50035-G32 specified as a separate item X 200 409 01

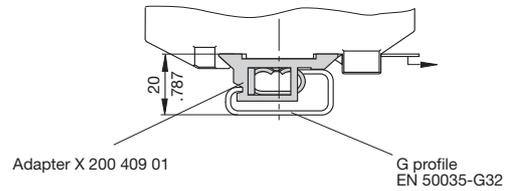

### Connector bus links -K10

X 210 589 01/2.5 mm<sup>2</sup>, (AWG 14) (black) up to 20 A max. load  
X 210 589 02/1.5 mm<sup>2</sup>, (AWG 16) (brown) up to 13 A max. load

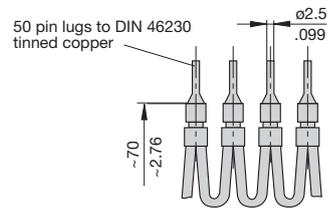

This is a metric design and millimeter dimensions take precedence ( $\frac{\text{mm}}{\text{inch}}$ )

All dimensions without tolerances are for reference only. In the interest of improved design, performance and cost effectiveness the right to make changes in these specifications without notice is reserved. Product markings may not be exactly as the ordering codes. Errors and omissions excepted.