


Technical Data Sheet:	DS201 - 01
Product Description	Nylon End Cap for corrugated conduit
Product Range	EC - End Cap

AtkoreTM

Flexicon

Roman Way, Coleshill
Birmingham
B46 1HG, United Kingdom
+44 (0)1675 466900
www.atkore.com/flexicon

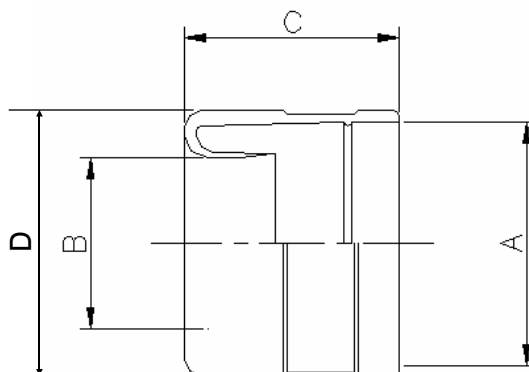

Material:
Nylon PA66

Colour:
Black

Fire Performance:
Low Fire Hazard
- Halogen, Sulphur & Phosphorous Free



For full details of fire performance details of PA66 fittings see data sheet reference DS601/0811

IP Rating:

N/A

Applications:

Snap onto the end of the conduit to prevent cable damage from chaffing at the cut end.

Features:

- UV Resistant - Black
- Fast Fit
- Suitable for fine or coarse pitch conduits

Temperature Performance:

-50°C to +135°C

Conduit size	Part No.	Nominal dimensions (mm)			
		A	B	C	D
16	EC16B	16.1	10.5	19.1	18.1
21	EC21B	21.65	15.2	19.1	23.6
28	EC28B	29.2	20.4	21.7	31.2
34	EC34B	34.9	25.9	22.4	36.9
42	EC42B	43.1	33.3	24.1	45
54	EC54B	55.4	45.4	25	57.1

Compliance, Approvals & Accreditation;



Typical Applications;



Construction



Rail



Machinery and OEM's



Defence

Errors, omissions and amendments excepted. As part of continuing product development Flexicon Ltd reserve the right to alter product specifications without prior notice. Data given is correct at time of compilation. Product specification and application data is for guidance only and does not constitute a warranty of any kind, either expressed or implied for Flexicon products or their suitability for a specific purpose. Third party approvals maybe limited to certain sizes within a product range.

Created by; David Ghent - Marketing Assistant	Approved by; Alex Smith - Technical Director	Date; September 2022	Page Number; Page 1 of 1
---	--	--------------------------------	------------------------------------