


Technical Data Sheet:	DS558/0512
Product Description	Straight, external thread, nickel plated brass, FSB / LFHUBRD conduit fitting.
Product Range	FSB - C Type Fitting

Roman Way, Coleshill
Birmingham
B46 1HG, United Kingdom
Tel: 00 44 (0)1675 466900
Website: www.flexicon.uk.com

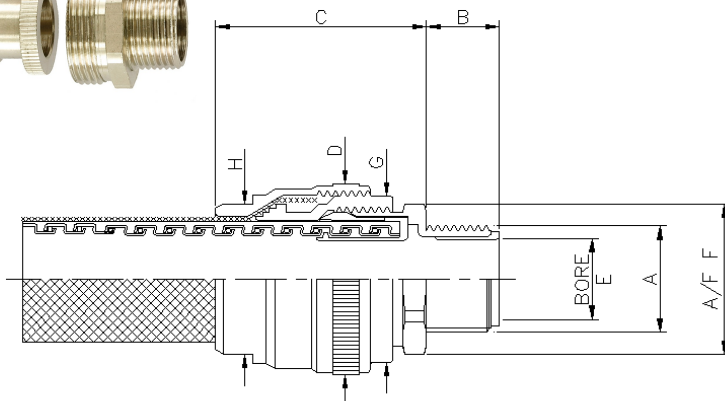

Material: Nickel Plated Brass
Colour: Self Colour
Fire Performance: Inherently Low Fire Hazard 
IP Rating: IP65
Applications: Ideally suited for routing of cables within machines and other general applications.
Features: • High tensile strength • EMC Screening
Temperature Performance: -50°C to +135°C

Conduit Size	Part No.	Metric Thread	Nominal Dimension (mm)						
		A	B	C	D	E	F	G	H
16	FSB16-M16-C	M16 X 1.5	12.0	35.0	32.6	11.5	24.0	26.0	24.0
16	FSB16-M20-C	M20 X 1.5	14.0	35.0	32.6	11.5	24.0	26.0	24.0
20	FSB20-M20-C	M20 X 1.5	14.0	37.0	35.6	15.3	26.0	29.0	28.0
25	FSB25-M25-C	M25 X 1.5	15.0	43.0	41.8	19.1	33.0	36.0	34.0
32	FSB32-M32-C	M32 X 1.5	16.0	47.0	48.6	26.0	40.0	42.0	41.0

Compliance, Approvals & Accreditation;



IEC EN 61386

EN 61386 Classification Available on request

Vibration and Shock resistant to EN 61373 Cat 2

Compliant to LUL standard 1-085-A3

Typical Applications;



Machinery and OEM's



Defence



Rail

Errors, omissions and amendments excepted. As part of continuing product development Flexicon Ltd reserve the right to alter product specifications without prior notice. Data given is correct at time of compilation. Product specification and application data is for guidance only and does not constitute a warranty of any kind, either expressed or implied for Flexicon products or their suitability for a specific purpose. Third party approvals maybe limited to certain sizes within a product range.

Created by; Colin Legg - Marketing Manager	Approved by; Ian Gibson - Technical Director	Date; May 2012	Page Number; Page 1 of 1
--	--	--------------------------	------------------------------------